



DH3~DH4=22287 (±20)

Coordinates

Mark	X	Y	R
GM	0	0	—
DH3	-8759	6900	—
DH4	8251	-7500	—
b 1	8032	7877	500
b 2	8624	7608	150
b 3	10099	5501	150
b 4	10149	4853	500
b 5	7809	-8098	500
b 6	7535	-8688	150
b 7	5416	-10145	150
b 8	4768	-10190	500
b 9	-8032	-7877	500
b 10	-8624	-7608	150
b 11	-10099	-5501	150
b 12	-10149	-4853	500
b 13	-7809	8098	500
b 14	-7535	8688	150
b 15	-5416	10145	150
b 16	-4767	10190	500



Section b1~b16

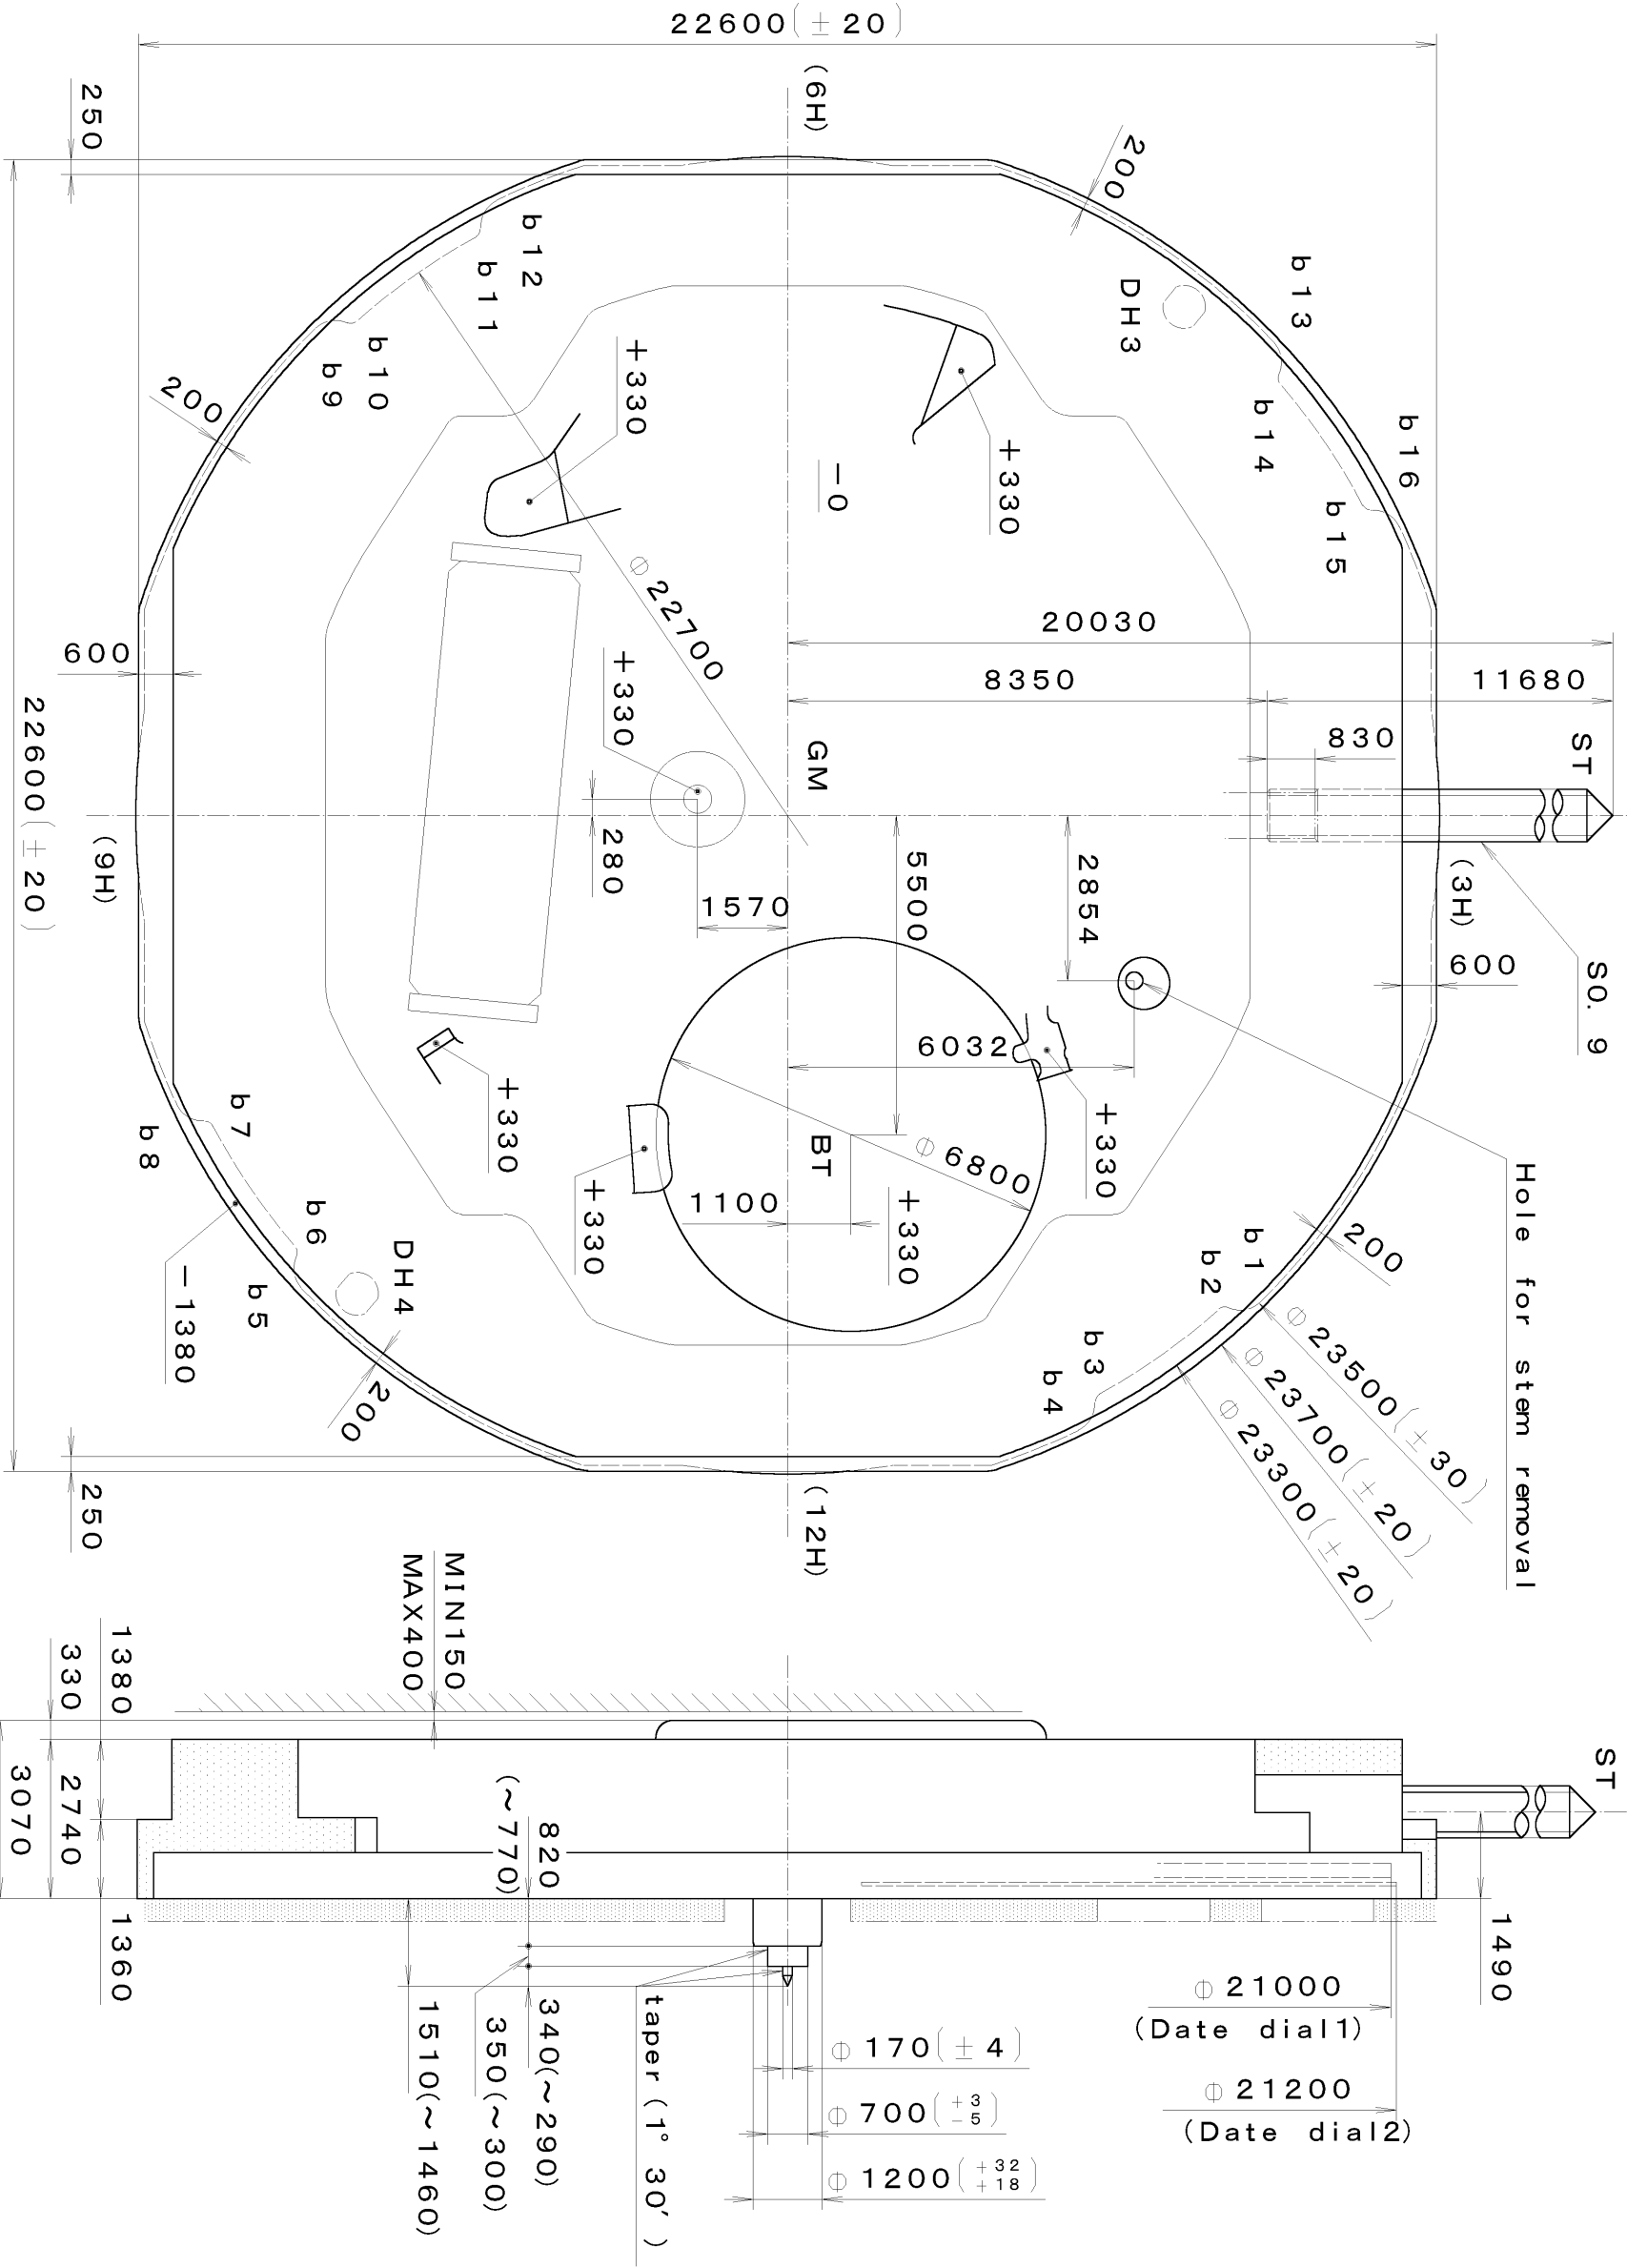


△	Quantity	1/1000 mm	Cal. No. : 1M52
△	Unit	Scale	Parts :
△	Scale	8 : 1	Date
△	Date	Drawn	Checked
△	Checked	T. Hiruta	Approved
△	Approved	Name :	Frame for Case
△	Material	Drawing No. : 1M52C0000	
△	Heat Treatment	General Tolerances	
△	Hardness	Dimensions	
△	Plating	Angles	

MIYOTA

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** TIPW 1M52-00A (01) *** (2100 1121) 02-01-10

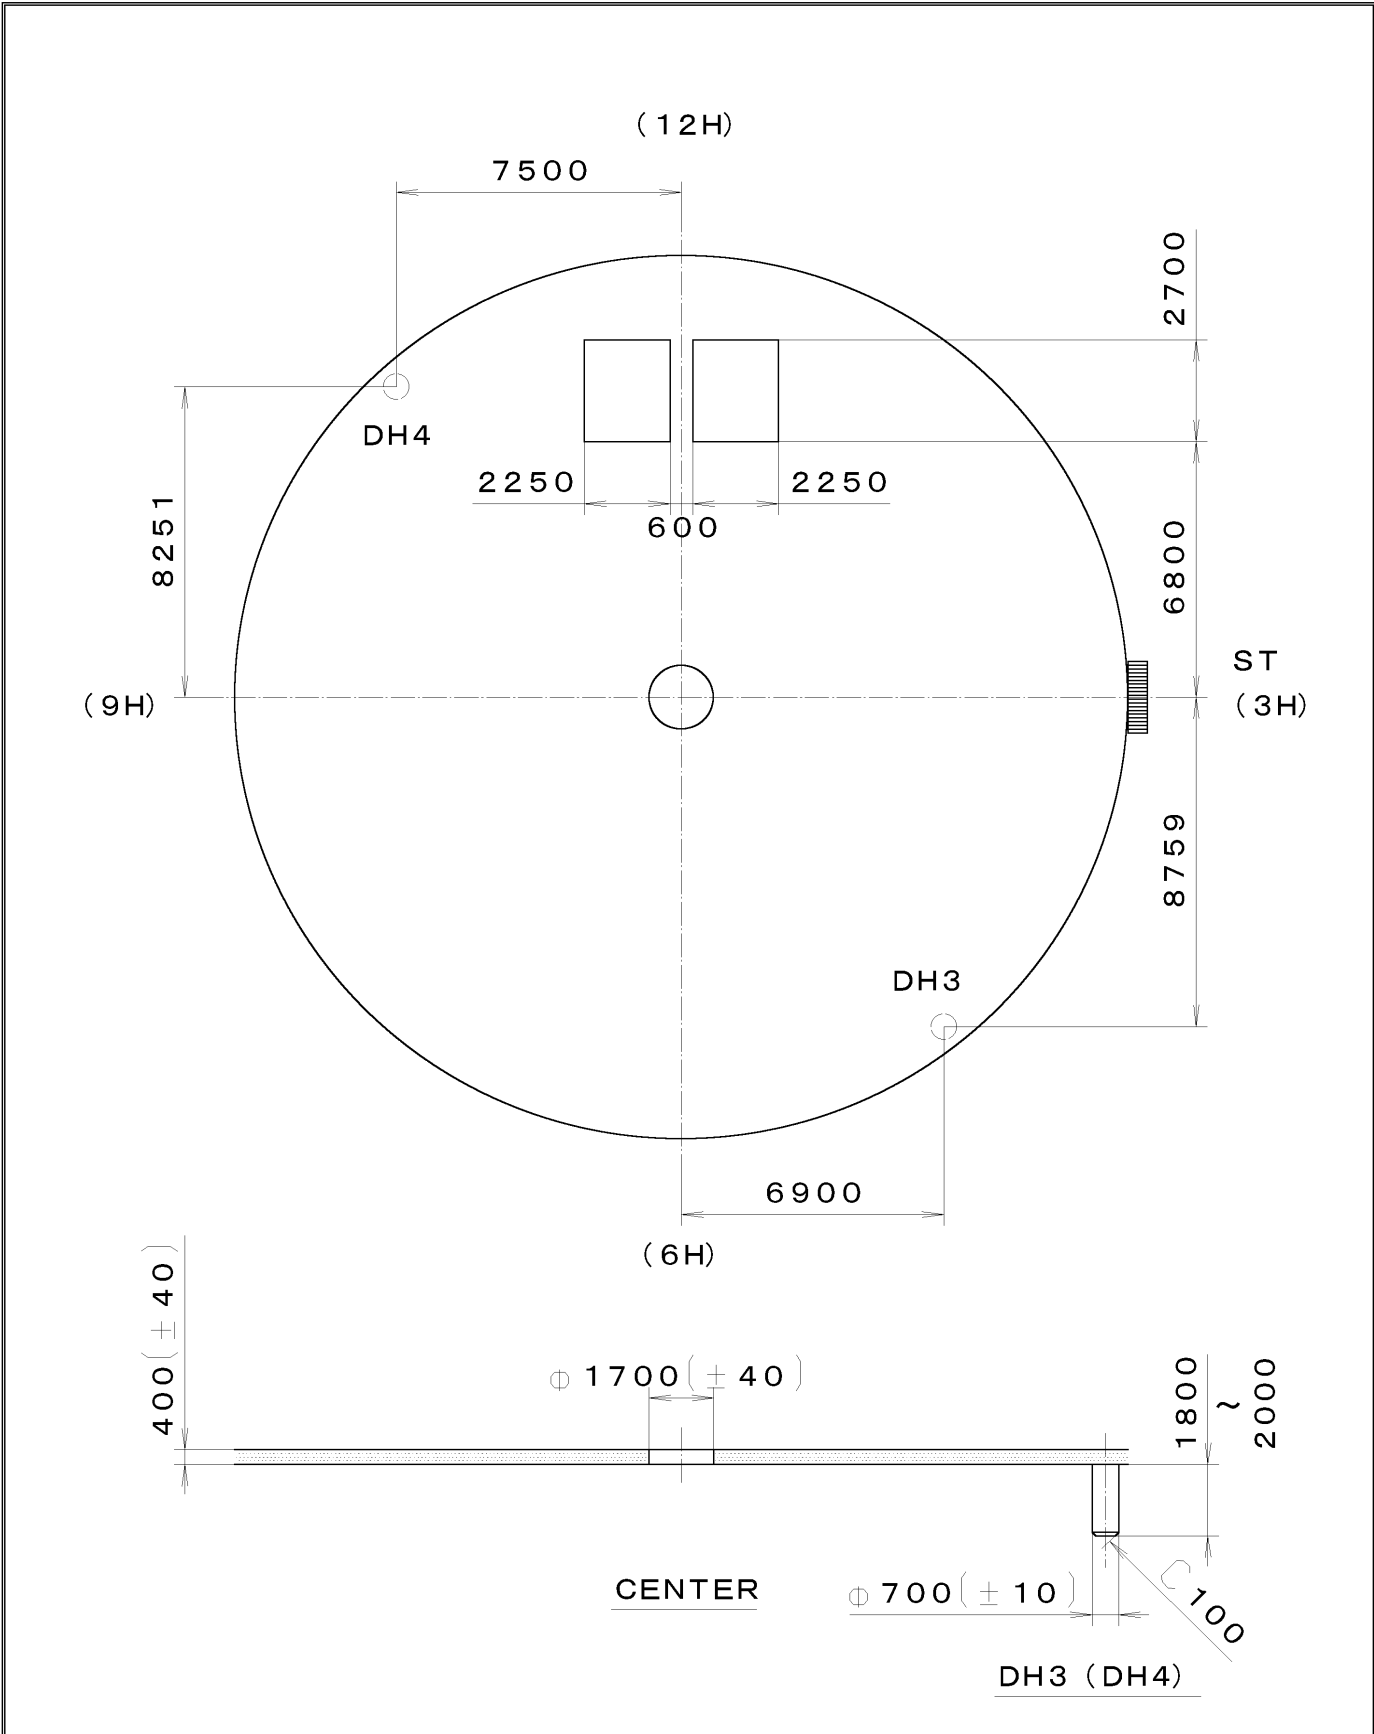

1M52-00A			Quantity		Cal. No. : 1M52-00A
1M52-00A			Unit	1/1000 mm	Parts:
1M52-00A			Scale	5:1	
1M52-00A			Date		
1M52-00A			Drawn		
1M52-00A			Checked	T. Hiruta	Name:
1M52-00A			Approved		Indications for Dial
Material					Drawing No. : 1M52D000
Heat Treatment			General Tolerances		MIYOTA
Hardness			Dimensions		
Plating			Angles		