


$$\text{DH3} \sim \text{DH4} = 22287 (\pm 20)$$

Mark	X	Y	R
GM	0	0	—
CS 1	9173	5700	—
CS 2	-8390	-6800	—
DH 3	-8799	6950	—
DH 4	8251	-7500	—
a 1	5798	1800	3000
a 2	1857	4250	3000
a 3	-1857	4250	3000
a 4	-5798	1800	3000

Coordinates

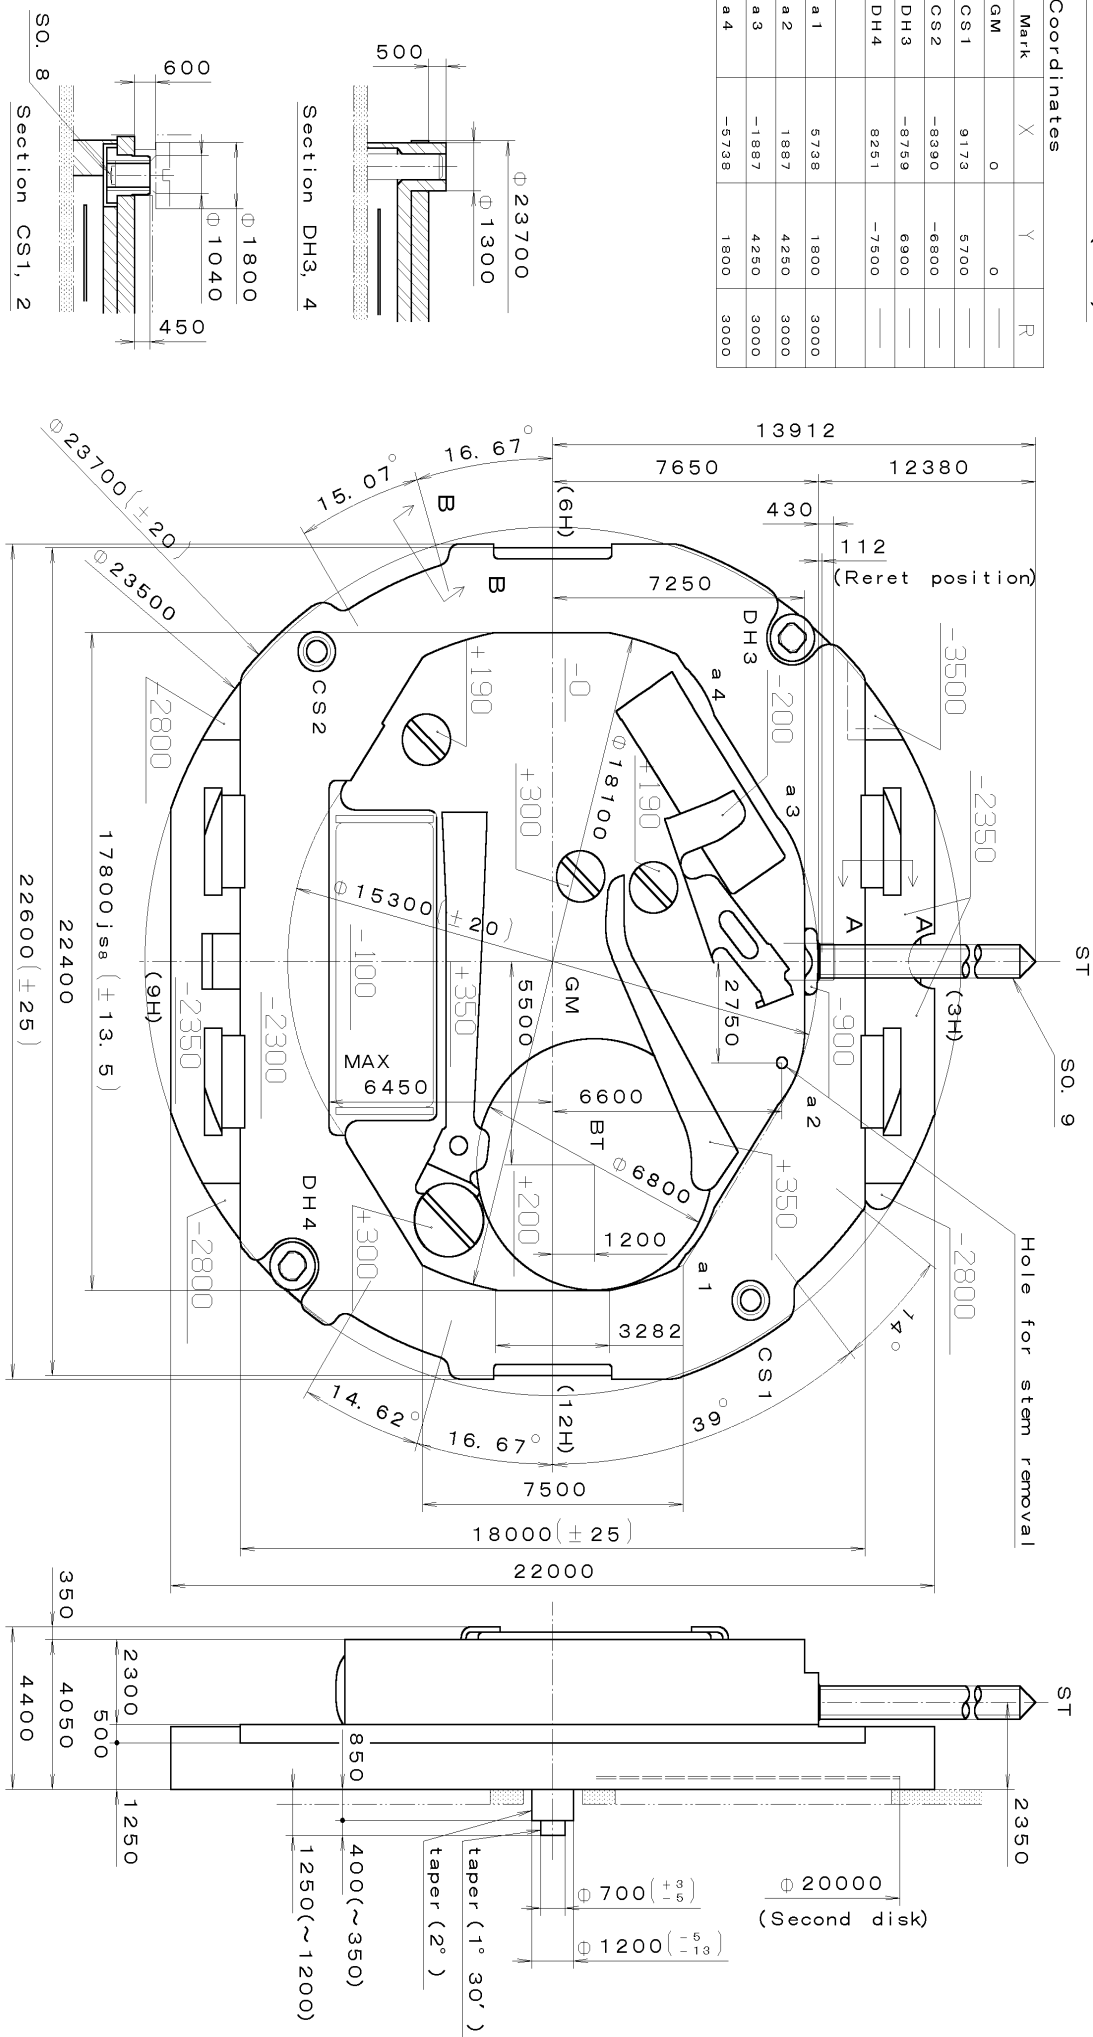

Section A-A (other hook)

Section B-B

△		Quantity		Cal. No. : 213D
△		Unit	1/1000 mm	
△		Scale	7 : 1	Parts :
△		Date		
△		Drawn		
△		Checked	T. Hiruta	Name : Frame for Case
△		Approved		Drawing No. : 213DC000
Material		General Tolerances		
Heat Treatment		Dimensions		
Hardness		Angles		
Plating				

```

*** TIPW 213D-00A (01) *** (2100 1121) 00-06-29

```



7			Quantity		Cal. No. : 213D-00A
6			Unit	1/1000 mm	
5			Scale	5:1	Parts:
4			Date		
3			Drawn		
2			Checked	T. Hiruta	Name:
1			Approved		Indications for Dial
Material					Drawing No. : 213DD000
Heat Treatment			General Tolerances		
Hardness			Dimensions		
Plating			Angles		

This drawing is provisional and subject to our reconfirmation and/or revision without notice.

*** T I P W (01) *** (2100 1121) 00-06-23

7			Quantity		Cal. No. :	
6			Unit	1/1000 mm	Parts : 065-299	
5			Scale	20:1		
4			Date			
3			Drawn		Name : SETTING STEM	
2			Checked	T. Hiruta		
1			Approved		Drawing No. : 2990S000	
Material						
Heat Treatment			General Tolerances			
Hardness			Dimensions			
Plating			Angles			

