

MOVEMENT SPECIFICATIONS
CAL. 1L60
 BY CITIZEN WATCH CO., LTD. JAPAN
NEW LADY'S 10 YEARS LIFE

1. BASIC SPECIFICATION

(1) CAL. No.

*TO CONFIRM WITH MOV'T DRAWING ATTACHED

CALIBRE	1L60
Ligne	6-3/4 X 8
Size*mm	17.4 x 18.2x ϕ 18.5mm
Total height	4.30mm
Hands	3
Date	○
Battery life	10
Battery	CR1616

(2) Time standard

Type of quartz : Tuning fork type quartz crystal
 Frequency : 32,768Hz
 Accuracy : **+/-20 s/month** worn under normal circumstances

(3) Battery installed

Type of battery : See above: JAPAN-MADE

(4) Others

Driving systems : Two-pole stepping motor
 Number of Jewel : No(0) jewel

(5) Additional Mechanisms & Features:

Quick Date Change by turning crown
Powercell Saving Reset Mechanism(PSRM)
Second hand stopping at optional position
Over-loading Compensation Device(OLCD)

(6) Balanceable weight of hands

Minute hand Max. 0.40 μ N·m
 Second hand Max. 0.07 μ N·m

2. SEPARATED PARTS

	1L60
Setting Stem	065-505

* Setting stem	065-505
Length of movement center to stem end...	18.01mm
Thread.....	Φ0.9 x 11.68mm

3. Others

* Measurement of time rate

The unit(gate) time of measurement must be set at "10s " or integer fold value of 10s owing to the DFC system, and the measurement must be performed in the form of complete watch.

* Marking on movement


**NO JEWELS
UNADJUSTED
1L60
MIYOTA CO., JAPAN**

* Typical clearance

Mov't - Caseback	minimum 150 μm or more
Top of hands - Glass	300 - 450 μm *
* depending and subject to the glass and case structure, and hand length	

*How to set time and date:

Date	-----	Pull out crown to the first click position, then: turn crown counter-clockwise for Date
Time	-----	Pull out crown to the second click position and turn crown until the time is set correctly

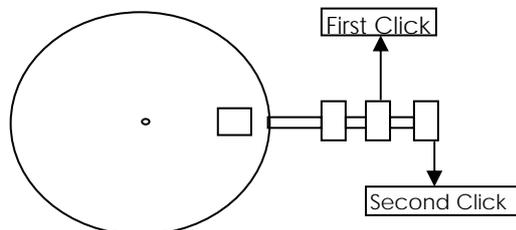

This specifications might be changed without prior notice.