

NEW LARGE RANGE ("11 1/2)

MOVEMENT SPECIFICATIONS
BY CITIZEN WATCH CO., LTD. JAPAN
MADE IN JAPAN

1. BASIC SPECIFICATION

(1) CAL. No.

*TO CONFIRM WITH MOV'T DRAWING ATTACHED

CALIBRE	2315	2305	2350	2353
FUNCTION	DATE	DAY/DATE	WIDE DAY/DATE	ENLARGE DATE
Ligne	11-1/2			
Size*mm	23.5 x 23.5x ϕ 26.4mm			
Total height	4.15mm			
Hands	3			
Battery life	3 YEAR			
Battery	SR626SW			

(2) Time standard

Type of quartz : Tuning fork type quartz crystal

Frequency : 32,768Hz

Accuracy : **+/-20 s/month** worn under normal circumstances

(3) Battery installed

Type of battery : See above: JAPAN-MADE

(4) Others

Driving systems : Two-pole stepping motor

Number of Jewel : No(0) jewel

(5) Additional Mechanisms & Features:

Quick Day/Date Change by turning crown
Powercell Saving Reset Mechanism(PSRM)
Second hand stopping at optional position
Over-loading Compensation Device(OLCD)

(6) Balanceable weight of hands

Minute hand Max. 0.40 μ N·m

Second hand Max. 0.07 μ N·m

2. SEPARATED PARTS

SETTING STEM	065-299
Length of movement center to stem end...	20.00mm
Thread.....	Φ0.9 x 12.38mm

3. Others

*** Measurement of time rate**

The unit(gate) time of measurement must be set at "10s " or integer fold value of 10s owing to the DFC system, and the measurement must be performed in the form of complete watch.

*** Marking on movement**

**NO JEWELS
UNADJUSTED
2315(or 2305, 2350, 2353)
MIYOTA CO., JAPAN**


*** Typical clearance**

Mov't - Caseback	minimum 150 μm or more
Top of hands - Glass	300 - 450 μm *

* depending and subject to the glass and case structure, and hand length

***How to set time and day/date:**

- Date ----- Pull out crown to the first click position, then:
turn crown counter-clockwise for Date
- Day ----- Pull out crown to the first click position, then:
turn crown anti-clockwise for Day
- Time ----- Pull out crown to the second click position and
turn crown until the time is set correctly

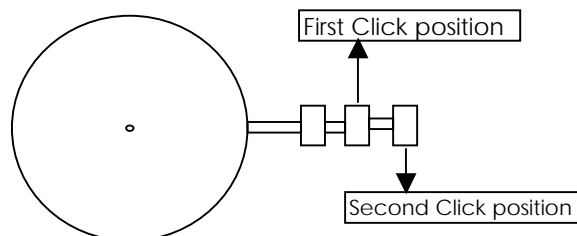

This specifications might be changed without prior notice.

